PressLock


STORAGE RACK DECKING


PressLock Storage Rack Decking offers a high percentage of open area and flush top design to allow storage items to slide on and off with ease.

Decking Features & Benefits:

- Manufactured from carbon steel
- Extreme load capacity for strength and stability for point load conditions
- Uniform strength across entire deck
- Simple drop-in installation
- Open mesh promotes air, light and water penetration
- Open mesh provides quick visible inventory checks
- Flush top design for smooth surface
- Galvanized finish available
- Variety of durable attractive powder coat colors available to compliment rack color

PressLock Storage Rack Decking has maximum visibility and open air design for light, air and water for maximum sprinkler system performance. (*See illustrations below.*)

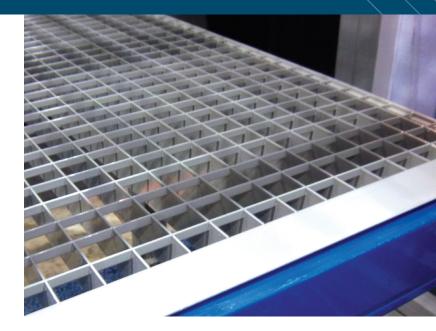





sprinkler system performance. (See illustrations



Style A: Deck with angle collar on step beam



Style D: Deck with end plate on top of box or structural beam



Style B: Deck on step beam without angle collar



Style E: Deck with angle collar on top of box or structural beam



Style C: Deck on top of box or structural beam without angle collar or end plate

1	

Style F: Deck with waterfall end plate on top of on step beam



OHIO GRATINGS, INC.

5299 SOUTHWAY ST. SW | CANTON, OH 44706 P: 800.321.9800 | F: 330.477.7872 WWW.OHIOGRATINGS.COM

PRESSLOCK

STORAGE RACK DECKING

Deck Selection Chart

Tight mesh configurations available to accommodate point loads and ideal for use with smaller products.

Product No.	Stand. Size W x D	Load Capacity	Weight	Mesh Opening	Open Area
DPL14-4636	46" x 36"	6,000 lbs.	65 lbs.	1-5/16" x 7/8"	83%
DPL14-4642	46" x 42"	5,000 lbs.	75 lbs.	1-5/16" x 7/8"	83%
DPL14-4648	46" x 48"	4,500 lbs.	86 lbs.	1-5/16" x 7/8"	84%
DPL07-4636	46" x 36"	6,000 lbs.	78 lbs.	1-5/16" x 7/16"	75%
DPL07-4642	46" x 42"	5,000 lbs.	91 lbs.	1-5/16" x 7/16"	75%
DPL07-4648	46" x 48"	4,500 lbs.	104 lbs.	1-5/16" x 7/16"	76%


Load capacity based on uniform distributed loading. For point loading consult with factory.



Decking Option Information:

- Custom sizes available
- Custom and larger open meshes available in:
 - 1-5/16" x 7/16"
 - 1-5/16" x 7/8"
 - 1-5/16" x 1-5/16"
 - 1-3/4" x 1-3/4"
 - 2-3/16" x 2-3/16"
- Heavier load capacities available
- 12 and 14 gauge construction
- Perfect for extreme point load requirements

◀ Manufacturer part number: 21PL7 S158 Close Mesh

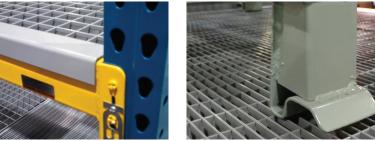





OHIO GRATINGS, INC.

5299 Southway St. SW | Canton, OH 44706 P: 800.321.9800 | F: 330.477.7872 www.ohiogratings.com